

# Domain names abuse and TLDs: from monetization towards mitigation

**Giovane C. M. Moura**, Moritz Müller, Marco Davids,  
Maarten Wullink, and Cristian Hesselman

SIDN Labs

`{first.lastname}@sidn.nl`

DISSECT 2017  
May 15th, 2017  
Lisboa, Portugal

# Introduction

- ▶ DNS provides a simple label for hosts, services, applications on the Internet
- ▶ Often, it is misused in malicious activities such as:
  - ▶ phishing campaigns
  - ▶ malware
  - ▶ spam
- ▶ Underlying each type of abuse, a different business model
  - ▶ provides the incentives for the crooks to keep on

# Introduction

- ▶ Plenty of research work in curbing DNS-related abuse [1, 2, 3, 4, 5, 6]
  - ▶ With a clear contribution
- ▶ But, they suffer from similar issues:
  1. Bound by dataset type/duration
  2. Cover specific attacks; missing broader view on all abuses
- ▶ **This paper:**
  1. Cover first issue with longitudinal measurements and registration (.nl)
  2. Present a survey on domain abuses from the point of view of a TLD operator (centralized view)

# Motivation: why doing this?


Came from a situation we faced :

- ▶ **There's no one size fits all**
- ▶ we have all this data
- ▶ how to better use it?
- ▶ where to begin with?
  - ▶ e.g.: malicious registered phishing or compromised phishing?
  - ▶ or other sort of abuse?
  - ▶ how to prioritize it?
  - ▶ **Which datasets too look first?**
- ▶ Other TLD operators may be facing the same problem

# Understanding business models

- ▶ Helps you to understand how money is made
- ▶ And how it impact your datasets
- ▶ It's been done many times in Internet abuse. E.g.: PharmaLeaks[7].
- ▶ Business model → abuse → money

# TLD Operations and Datasets

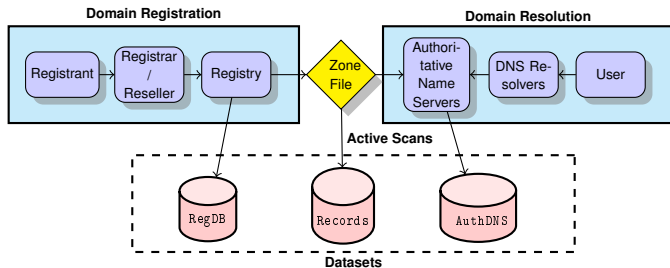

**Figure:** TLD Operations: registration (left), domain name resolution (right), and derived datasets.

- ▶ RegDB: your registration DB
- ▶ Zone File Scans: in our case, the `OpenIntel.nl` project
- ▶ AuthDNS: data from auth servers, we use ENTRADA [8]

# Business Models Survey and Lit Review

<b>Business</b>	<b>Spam</b>	RegDB	AuthDNS	Records	<b>Lit</b>
Phishing(0-day)	Yes	Weak	Strong	Weak	[3, 6]
Phishing(comp.)	Yes	None	Strong	Weak	[9]
Parking (Ads)	No	Strong	Weak	Strong	[10, 11]
Parking (Mal)	No	Strong	Weak	Strong	[10, 11]
Fake Goods	Yes	Weak	Weak	Medium	[6, 7]
Drop-Catch	No	Medium	Medium	Weak	[12]
Botnet C&C	No	Medium	Strong	?	[13]
Blackhat SEO	No	Medium	Medium	Strong	[14, 15]

**Table:** Business Models and Datasets/signal “strength”, and research works that cover those.

# Phishing (0-day)

- ▶ Two types of phishing: compromised and 0-day (newly registered)
- ▶ 0-day phishing business model:
  1. Registered domain(s)
  2. Large spam campaign at the same time
  3. ID theft (ID, credit card, etc).
  4. Money: selling the data, using it themselves



# Phising (0-day)

## ► Datasets:

1. Records: harder to detect, IP/registrar reputation
2. RegDB: hard but possible to detect (it's been done for spamming domains [16])
3. AuthDNS: strongest signal, but after attack has started [3, 6]

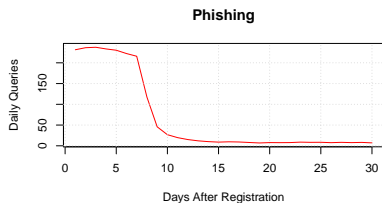
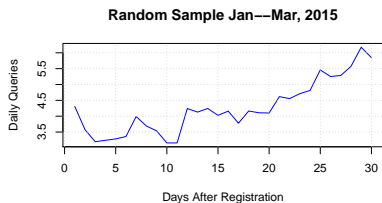


Figure: .nl Random vs Phishing new domains average daily queries [6]

# Phising (compromised)

- ▶ Most common sort of phishing
- ▶ Typically on hacked CMSes, instead of newly registered
- ▶ Business model:
  1. Hack a website
  2. Sam campaign at the same time
  3. ID theft (ID, credit card, etc).
  4. Money: selling the data, using it themselves

# Phishing (compromised)

## ► Datasets:

1. Records: harder to detect, typically no changes
2. RegDB: also, usually no changes in here
3. AuthDNS: possible to detect, very hard to tell false positives source

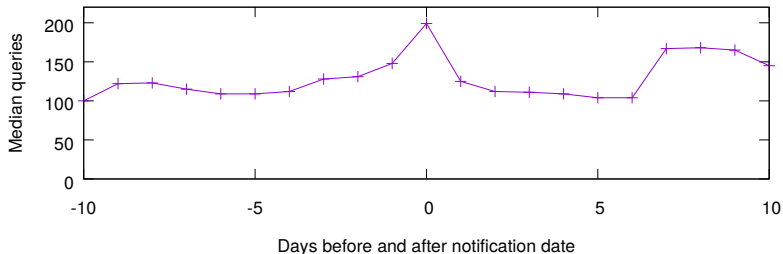


Figure: Median daily queries for 1,374 compromised phishing sites on .nl, before and after Netcraft's notification


# Parking

- ▶ Parking is a big industry
- ▶ Business model:
  1. Register many domains (bulk)
  2. Wait for traffic to come in
  3. Redirect to ad networks
  4. Money:
    - ▶ Legal: ad networks
    - ▶ Illegal: malicious, ID-theft

# Parking

## ► Datasets:

1. Records: can be done, same ASes, IPs, etc
2. RegDB: Yes, bulk registrations, same registrar, etc.
3. AuthDNS: usually not the case

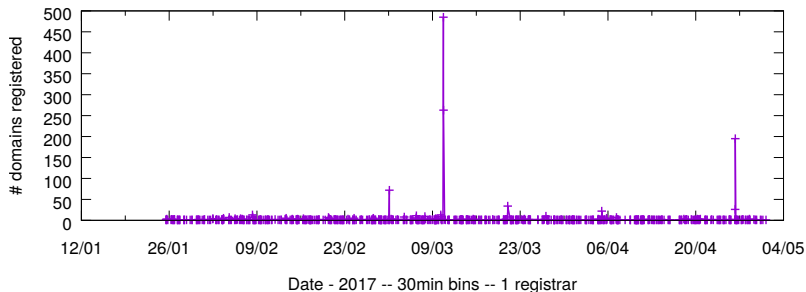


**Figure:** Number of domains registered for one registrar, in every 30min – spikes indicates anomalies

# Parking

## ► Datasets:

1. Records: can be done, same ASes, IPs, etc
2. RegDB: Yes, bulk registrations, same registrar, etc.
3. AuthDNS: usually not the case

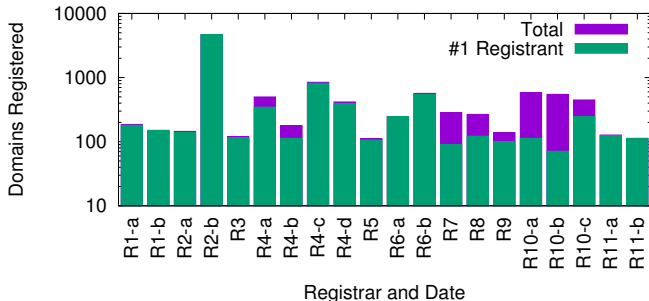

**Figure:** Anomalous registrations for Registrars and Top 1 registrant – most of registrations are done in bulk by 1 registrant.

# Parking

- ▶ Key aspect: tell ad networks from malicious (e.g.: malicious redirection)
- ▶ Malicious redirection type has more incentives to use a new e-mail addresses during registrations (and no reuse)
- ▶ We've seen that for ad nets
- ▶ Need to develop a solution that address this (open)

# Fake Goods

- ▶ When we develop nDEWS [8] to detect 0-day phishing, we notice a lot of domains were neither phishing neither false positives
- ▶ Their frequency and continuity suggested a profitable business model
- ▶ Just like phishing (0-day) business model, and detection too
- ▶ This sort of abuse falls into a “gray area”:
  - ▶ not as bad as phishing
  - ▶ still bad because of ID theft
  - ▶ hard to tell if it's fake or not
- ▶ Detection: similar to 0-day phishing



# Botnet C&C

- ▶ Domains can be used also for botnet command-and-control channels
- ▶ Domain generation algorithms (DGA) typically used for that
- ▶ Bots are supposed to contact a new domain every  $x$  time
- ▶ DGAs generated many, but only a few are registered , to avoid detection

# Botnet C&C

- ▶ Business model: registration
- ▶ Datasets:
  1. RegDB: registration of “weird” looking names
  2. Records: in combination with the previous
  3. AuthDNS: NXDOMAIN queries for non registered DGAs

# Summary

- ▶ DNS abuse has been active for many years
- ▶ There are many types, which different business models
- ▶ Business models of DNS abuse impact datasets differently
- ▶ TLDs ops should develop applications according to business models
  - ▶ no one-size fits all
- ▶ Which one first?
  - ▶ that depends on the frequency of the abuse on their zone
- ▶ This paper presents a **survey** and a **discussion** on which datasets can be used
  - ▶ And some of our experience with these abuses on `.nl`

# Questions?

- ▶ Contact:
  - ▶ <http://sidnlabs.nl>
  - ▶ [giovane.moura@sidn.nl](mailto:giovane.moura@sidn.nl)
  - ▶ Twitter: @giomourasec
- ▶ Thank you for your attention

Download our paper at:

[https://www.sidnlabs.nl/downloads/publications/  
dissect2017.pdf](https://www.sidnlabs.nl/downloads/publications/dissect2017.pdf)

# Bibliography I

- [1] S. Hao, A. Kantchelian, B. Miller, V. Paxson, and N. Feamster, “PREDATOR: Proactive Recognition and Elimination of Domain Abuse at Time-Of-Registration,” in *Proceedings of the 2016 ACM CCS*, October 2016.
- [2] S. Hao, M. Thomas, V. Paxson, N. Feamster, C. Kreibich, C. Grier, and S. Hollenbeck, “Understanding the Domain Registration Behavior of Spammers,” in *Proceedings of the 2013 Conference on Internet Measurement Conference*, ser. IMC '13. New York, NY, USA: ACM, 2013, pp. 63–76.
- [3] Hao, Shuang and Feamster, Nick and Pandrangi, Ramakant, “Monitoring the Initial DNS Behavior of Malicious Domains,” in *Proceedings of the 2011 ACM SIGCOMM Conference on Internet Measurement Conference*, ser. IMC '11. New York, NY, USA: ACM, 2011.

## Bibliography II

- [4] M. Antonakakis, R. Perdisci, W. Lee, N. Vasiloglou II, and D. Dagon, “Detecting Malware Domains at the Upper DNS Hierarchy.” in *USENIX Security Symposium*, 2011, pp. 16–32.
- [5] M. Antonakakis, R. Perdisci, D. Dagon, W. Lee, and N. Feamster, “Building a Dynamic Reputation System for DNS.” in *USENIX security symposium*, 2010, pp. 273–290.
- [6] Giovane C. M. Moura, Moritz Muller, Maarten Wullink, and Cristian Hesselman, “nDEWS: a New Domains Early Warning System for TLDs,” in *IEEE/IFIP International Workshop on Analytics for Network and Service Management (AnNet 2016)*, co-located with *IEEE/IFIP Network Operations and Management Symposium (NOMS 2016)*, April 2016.

## Bibliography III

- [7] D. McCoy, A. Pitsillidis, G. Jordan, N. Weaver, C. Kreibich, B. Krebs, G. M. Voelker, S. Savage, and K. Levchenko, “PharmaLeaks: Understanding the Business of Online Pharmaceutical Affiliate Programs,” in *Proceedings of the 21st USENIX Security Symposium*. Bellevue, Washington, USA: USENIX Association, August 2012.
- [8] Maarten Wullink, Giovane C. M. Moura, Müller, M, and Cristian Hesselman, “ENTRADA: a High Performance Network Traffic Data Streaming Warehouse,” in *Network Operations and Management Symposium (NOMS), 2016 IEEE* , April 2016.
- [9] A. Noroozian, M. Korczynski, S. Tajalizadehkhoob, and M. van Eeten, “Developing security reputation metrics for hosting providers,” in *8th Workshop on Cyber Security Experimentation and Test (CSET 15)*, 2015.

## Bibliography IV

- [10] S. Alrwais, K. Yuan, E. Alowaisheq, Z. Li, and X. Wang, “Understanding the Dark Side of Domain Parking,” in *23rd USENIX Security Symposium (USENIX Security 14)*. San Diego, CA: USENIX Association, Aug. 2014, pp. 207–222.
- [11] T. Vissers, W. Joosen, and N. Nikiforakis, “Parking Sensors: Analyzing and Detecting Parked Domains.” in *Proceedings of the 2015 Network and Distributed System Security Symposium (NDSS 2015), San Diego, California, USA.*, 2015.
- [12] C. Lever, R. Walls, Y. Nadji, D. Dagon, P. McDaniel, and M. Antonakakis, “Domain-Z: 28 Registrations Later,” In: *Proceedings of the 37th IEEE Symposium on Security and Privacy*. San Jose, California., 2016.



# Bibliography V

- [13] B. Stone-Gross, M. Cova, L. Cavallaro, B. Gilbert, M. Szydowski, R. Kemmerer, C. Kruegel, and G. Vigna, “Your botnet is my botnet: analysis of a botnet takeover,” in *Proceedings of the 16th ACM conference on Computer and communications security*. ACM, 2009.
- [14] niche site project, “Private Blog Networks <http://nichesiteproject.com/private-blog-networks/>,” Sep. 2016.
- [15] K. Du, H. Yang, Z. Li, H. Duan, and K. Zhang, “The Ever-Changing Labyrinth: A Large-Scale Analysis of Wildcard DNS Powered Blackhat SEO,” in *25th USENIX Security Symposium (USENIX Security 16)*. USENIX Association.

## Bibliography VI

- [16] S. Hao, A. Kantchelian, B. Miller, N. Feamster, and V. Paxson, “PREDATOR: Proactive Recognition and Elimination of Domain Abuse at Time-Of-Registration,” in *Proceedings of the SIGSAC Conference on Computer and Communications Security*, 2016.